



The tablet TAB10 is designed for professional use in a static position and does not require any batteries.

Powered by Android applications, it is ideal to book meeting rooms in conjunction with a calendar system such as MS-Exchange, M365, Google Workspace or IWMS application.

It can also be used for kiosks, for multimedia viewing or as a complement to a building management system.

The tablet is equipped with a rear hanging system for easy mounting on a drywall or glass using one of our PoE adapters (NAPOE109FT or NAPOE109KT).

## Strengths

- Thickness: 11 mm
- Android 9 OS with Qeedji System
- Presence detector for switching the screen to standby mode
- Kiosk mode
- USB-C
- PoE adapter
- Surround LED Status Light Bar
- Hardware HD Video Decoder
- Low Power Consumption: 9W
- Quiet (fanless)
- Wifi, BLE
- NFC/MIFARE
- 125kHz RFID
- Reset button
- Mechanical microphone disabling

## Specification

### Supported media formats :

Image: JPEG, PNG, GIF, SVG  
 Video: MPEG2, H265, H264 1080p  
 Audio: MP3, AAC, MPEG1 layer 2  
 Diaporama: PDF, MS-Powerpoint  
 Web: HTML5, CSS3, JavaScript

### Protocols :

HTTP(S), UDP, NTP, SMTP, 802.1X

### Processor :

CPU: ARM Quad core

### Peripherals :

1x USB-C (PD + USB2)  
 1x USB POGO at the rear  
 1x NFC/MIFARE  
 1x RFID 125kHz  
 1x BLE

### LED indicator :

Red/Green/Orange on screen outline

### Storage :

Internal Micro SD Card: 16Go

### Operating system :

AOSP 9 with Qeedji System

### Software compatibility :

Android APK

### Screen :

16:10, 1280x800 px  
 10.1 inches

### Audio :

Mono audio output  
 Microphone input with inhibition

### Camera :

None

### Network :

1x Wifi 5 with built-in antenna  
 1x Ethernet 10/100 BaseT via optional adapter or USB-C

### Power supply :

5VDC via USB-C

### Environment :

Temperature : 0~45°C

### Mechanical characteristics :

Weight: 800gr  
 Size (WxHxD): 255x178,5x10,8 mm


### Warranty :

1 year (parts and labour)

### Manufacturer :

Qeedji

# Block Diagram

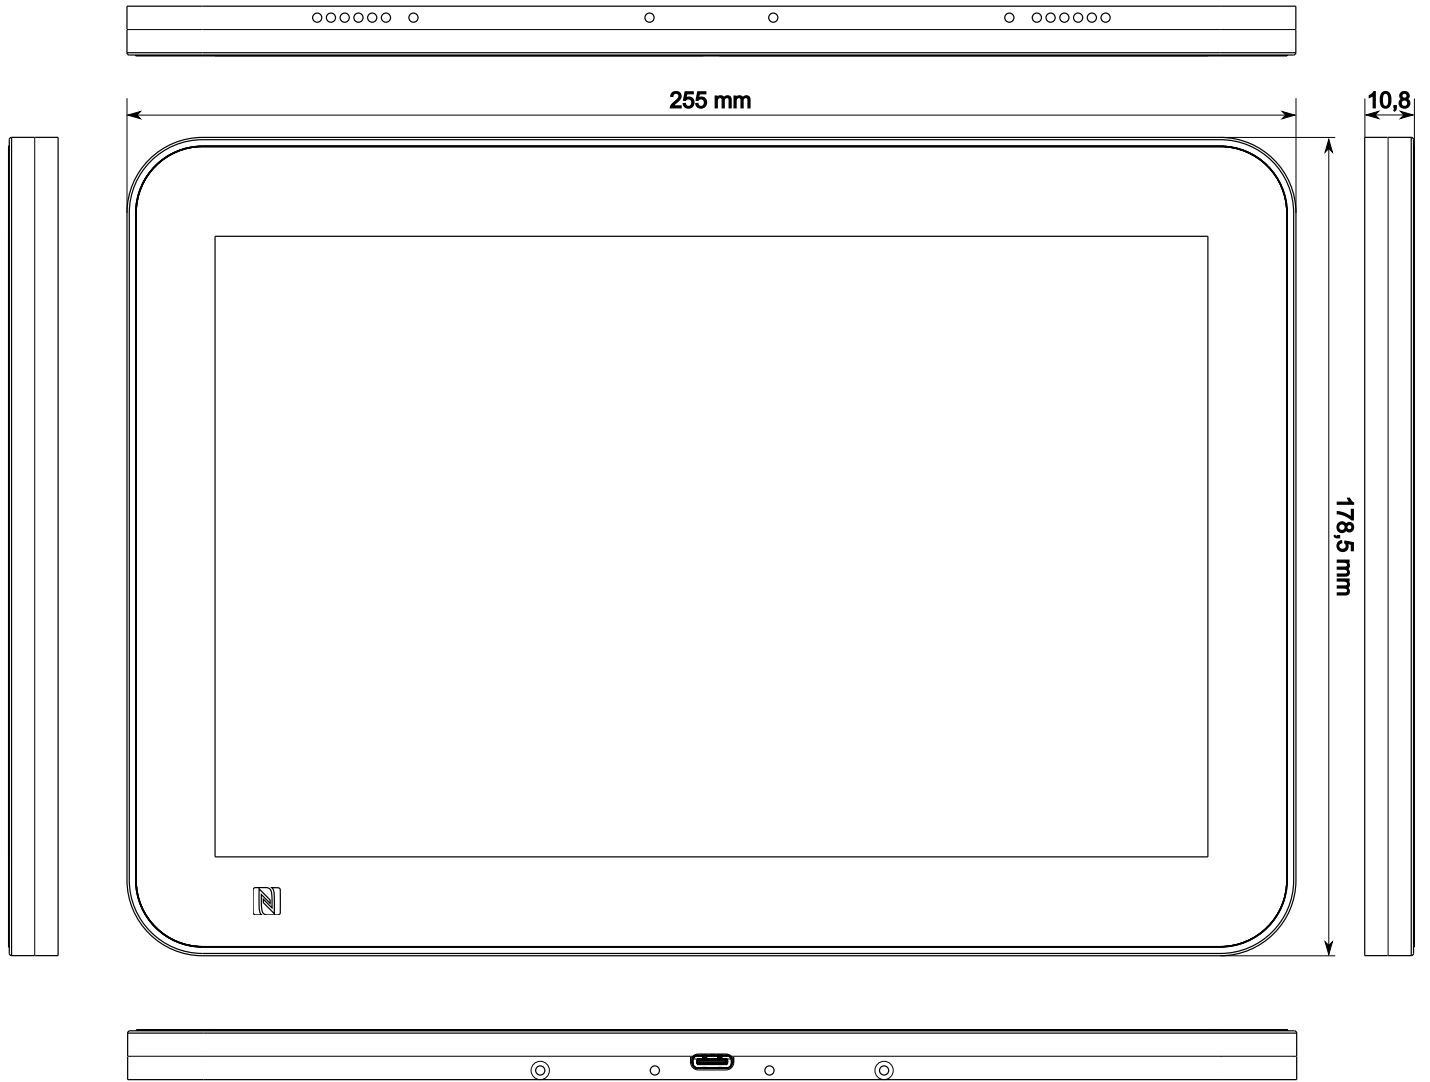

## Ordering Information

Hardware  
Reference

Description

Hardware Reference	Description
TAB10	10" AOSP tablet (Rev b)
EXC.NAPOE109KU	Flush-Mounted Ethernet PoE KRONE-USB-C adapter
EXC.NAPOE109KT	KRONE Ethernet PoE to TAB10 Surface Mount Bracket (Data and Power Delivery)
EXC.NAPOE109FT	Female RJ45 Ethernet PoE to TAB10 Surface Mount Bracket (Data and Power Delivery)

**Qeedji**

www.qeedji.tech  
sales@qeedji.tech



Ref: BF-TAB10B-002A\_en